


INSTRUCTIONS


! NOTICE:

1. The compatible ink cartridge is with no chip, please use it with the original chip for the original cartridge.
2. Please be sure to confirm the right model and color before installing the original chip onto the relative compatible ink cartridge.
3. If you want to change several cartridges at the same time, please replace the chip one by one to avoid mixing the models.
4. Please replace the chip carefully, don't damage or mix it.
5. Because of the use of the original chip, the computer, the printer and the indicator light of the chip can't show the information about the remainder ink. Please take out of the compatible ink cartridge and check the remainder ink. Please change the ink cartridge in time if the ink runs out.


STEPS:

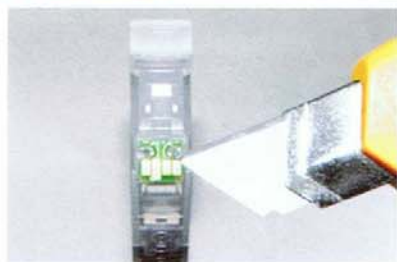

1. Take the original empty ink cartridge out of the printer, and cut the little point on the chip by knife carefully, take the original chip off.

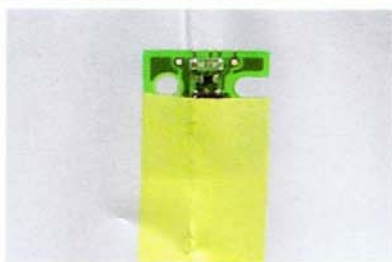


2. Stick hard the adhesive plaster onto the back of the original chip, but please pay attention to not stick the hole on the chip.

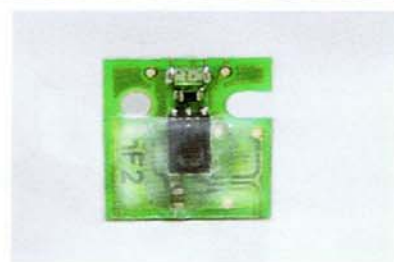

3. Stick hard the original chip onto the relative compatible ink cartridge.



4. Remove the sticker film, open the cap, then install the compatible ink cartridge into the printer.

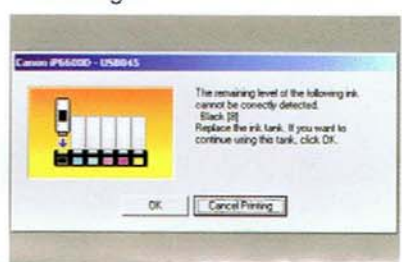

5. If the printer shows error message and the computer shows "The remaining level of the ink cannot be correctly detected" when printing test or nozzle test, please press the "⊕/⊖" button of Canon PIXMA iP4200/iP5200/iP5200R printer for at least 5 seconds, or press the "⊕ Stop/Reset" button of Canon PIXMA iP6600D/MP500/MP800/MP950 printer for at least 5 seconds, then release the button. This operation will release the function for detecting the remaining level of the ink. You can start to print. Please be noted that the computer, the printer and the indicator light of the chip can't show the information about the remainder ink.



6. Once the printing effect is getting bad such as lack of color, please take out of the compatible ink cartridge and check the remainder ink. If the ink runs out, please repeat steps 3 and 4 to replace a new compatible ink cartridge in time.

For optimal printing results, it is highly recommended to clean your print head before switching from OEM cartridges to compatible cartridges, or, when you switch to a different brand name cartridge.